





## 直板型糖机链


Sugar chains with straight plate

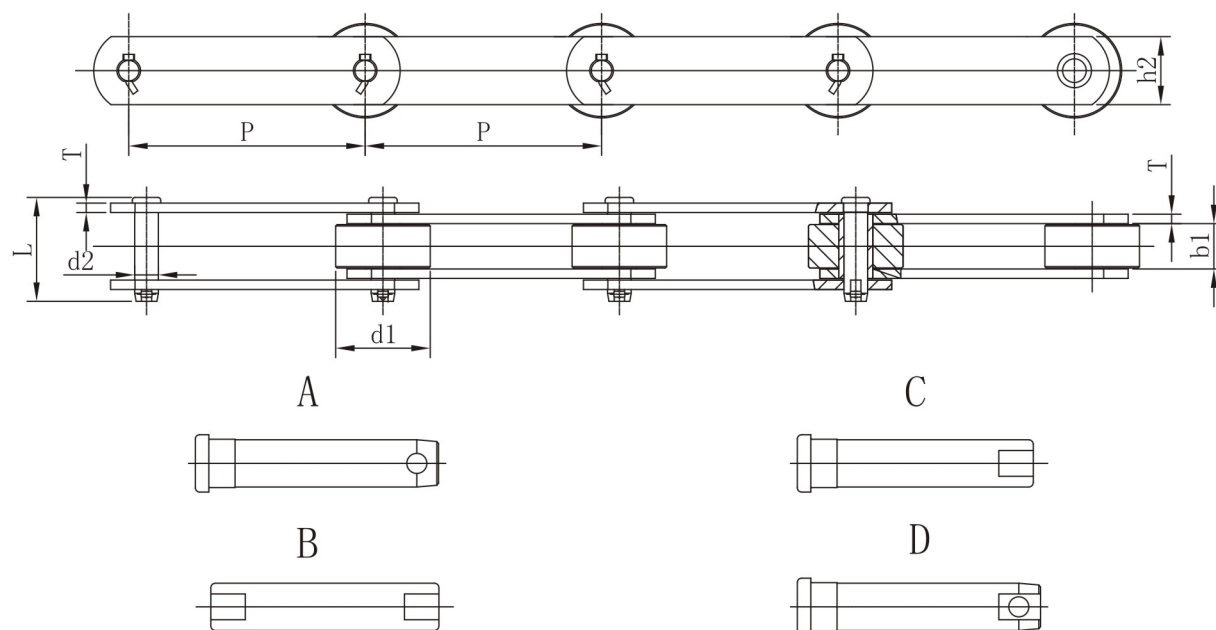


| 环球链号<br>Universal<br>Chain<br>No. | 节距<br>Pitch | 内节内宽<br>Width<br>between<br>inner plates | 滚子直径<br>Roller<br>diameter |          |      | 销轴<br>Pin  |      | 链板高度<br>Inner<br>plate<br>depth | 链板厚度<br>Plate<br>thickness | 抗拉强度<br>Ultimate<br>tensile<br>strength | 每米重量<br>Weight<br>per<br>meter |  |  |
|-----------------------------------|-------------|------------------------------------------|----------------------------|----------|------|------------|------|---------------------------------|----------------------------|-----------------------------------------|--------------------------------|--|--|
|                                   |             |                                          |                            |          |      |            |      |                                 |                            |                                         |                                |  |  |
|                                   |             |                                          |                            |          |      |            |      |                                 |                            |                                         |                                |  |  |
| P                                 | b1<br>max   | d 1<br>max                               | d 2<br>max                 | L<br>max | Type | h 2<br>max | T    | Q<br>min                        | q<br>≈                     |                                         |                                |  |  |
| mm                                | mm          | mm                                       | mm                         | mm       | mm   | mm         | mm   | kN                              | kg/m                       |                                         |                                |  |  |
| 09040                             | 101.6       | 29.3                                     | 50.8                       | 17.46    | 78.5 | A          | 44.5 | 8                               | 178.4                      | 13.16                                   |                                |  |  |
| 09041                             | 101.6       | 31.8                                     | 57.15                      | 15.88    | 72.8 | B/C        | 38.1 | 6.4                             | 72.3                       | 11.67                                   |                                |  |  |
| 09050                             | 127         | 38.4                                     | 69.85                      | 19       | 96.5 | B/C        | 50.8 | 9.6                             | 180                        | 19.22                                   |                                |  |  |
| 09060                             | 152.4       | 37.7                                     | 69.85                      | 18.9     | 94.3 | A/D        | 50.8 | 9.5                             | 250                        | 17.2                                    |                                |  |  |
| 09061                             | 152.4       | 37.7                                     | 69.85                      | 18.9     | 95.2 | A          | 57.2 | 9.5                             | 377.9                      | 18.74                                   |                                |  |  |
| 09062                             | 152.4       | 37.8                                     | 69.8576.273                | 22.23    | 97.1 | D          | 57.2 | 9.5                             | 444.5                      | 18.519.519.2                            |                                |  |  |
| 09063                             | 152.4       | 38                                       | 76.2                       | 23.83    | 102  | A          | 60.3 | 10.3                            | 622.3                      | 21.88                                   |                                |  |  |
| 09064                             | 152.4       | 38                                       | 76.2                       | 23.83    | 102  | D          | 61.9 | 10.3                            | 635                        | 22.2                                    |                                |  |  |

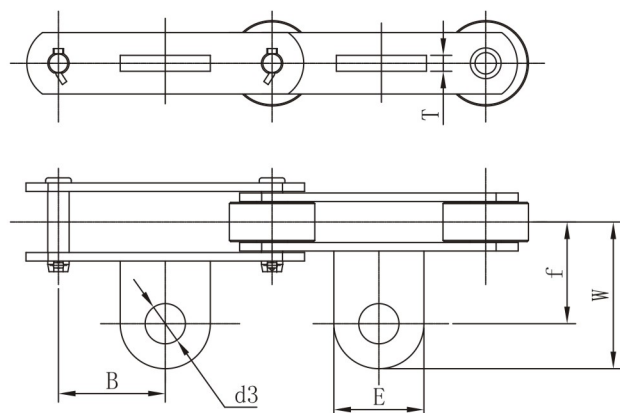

| 环球链号<br>Universal<br>Chain<br>No. | B    | f  | W    | E  | d3 | T  |
|-----------------------------------|------|----|------|----|----|----|
|                                   | mm   | mm | mm   | mm | mm | mm |
| 09060                             | 76.2 | 67 | 87.4 | 45 | 21 | 15 |
| 09061                             | 76.2 | 67 | 87.4 | 45 | 21 | 15 |
| 09062                             | 76.2 | 67 | 87.4 | 45 | 21 | 15 |

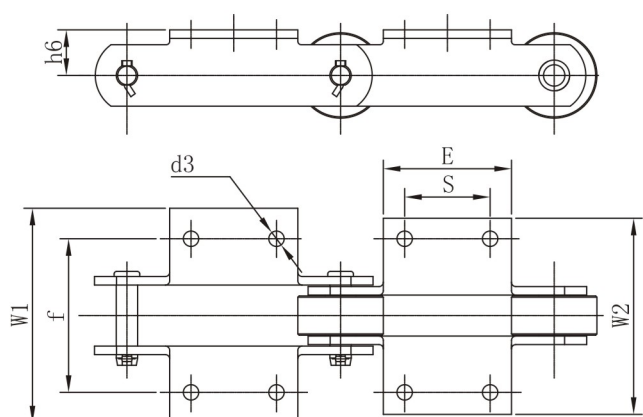

| 环球链号<br>Universal<br>Chain<br>No. | h6   | S    | E     | d3         | f     | W1    | W2    |
|-----------------------------------|------|------|-------|------------|-------|-------|-------|
|                                   | mm   | mm   | mm    | mm         | mm    | mm    | mm    |
| 09060                             | 41.3 | 76.2 | 114.3 | 13         | 111.1 | 171.5 | 151.1 |
| 09061                             | 41.3 | 76.2 | 114.3 | 13         | 111.1 | 165.1 | 144.7 |
| 09062                             | 41.3 | 76.2 | 114.3 | 11.1/13/14 | 111.1 | 165.1 | 144.7 |
| 09063                             | 44.5 | 76.2 | 114.3 | 14.3/12.7  | 111.1 | 165.1 | 143.1 |

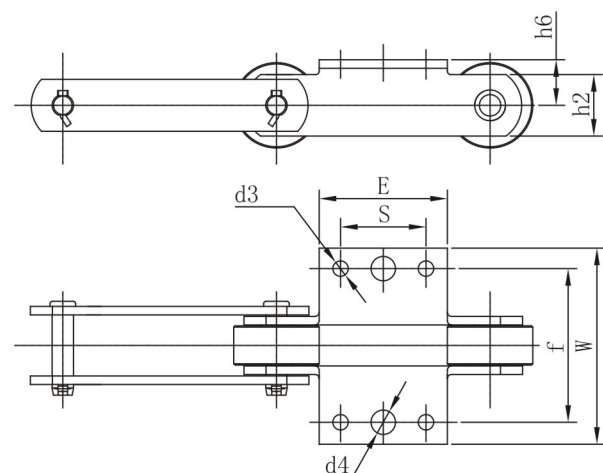


| 环球链号<br>Universal<br>Chain<br>No. | h6   | S    | E    | d3   | d4   | f     | W     | h2   |
|-----------------------------------|------|------|------|------|------|-------|-------|------|
|                                   | mm   | mm   | mm   | mm   | mm   | mm    | mm    | mm   |
| 09041                             | 36   | 50.8 | 82.6 | 10.3 | 15   | 101.6 | 133.6 | 44.4 |
| 09050                             | 39.6 | 50.8 | 82.6 | 10.3 | 13.5 | 103.4 | 139.4 | 50.8 |



# 弯板型糖机链 (2614型)

☆ Cranked-link sugar chains (2614 type)

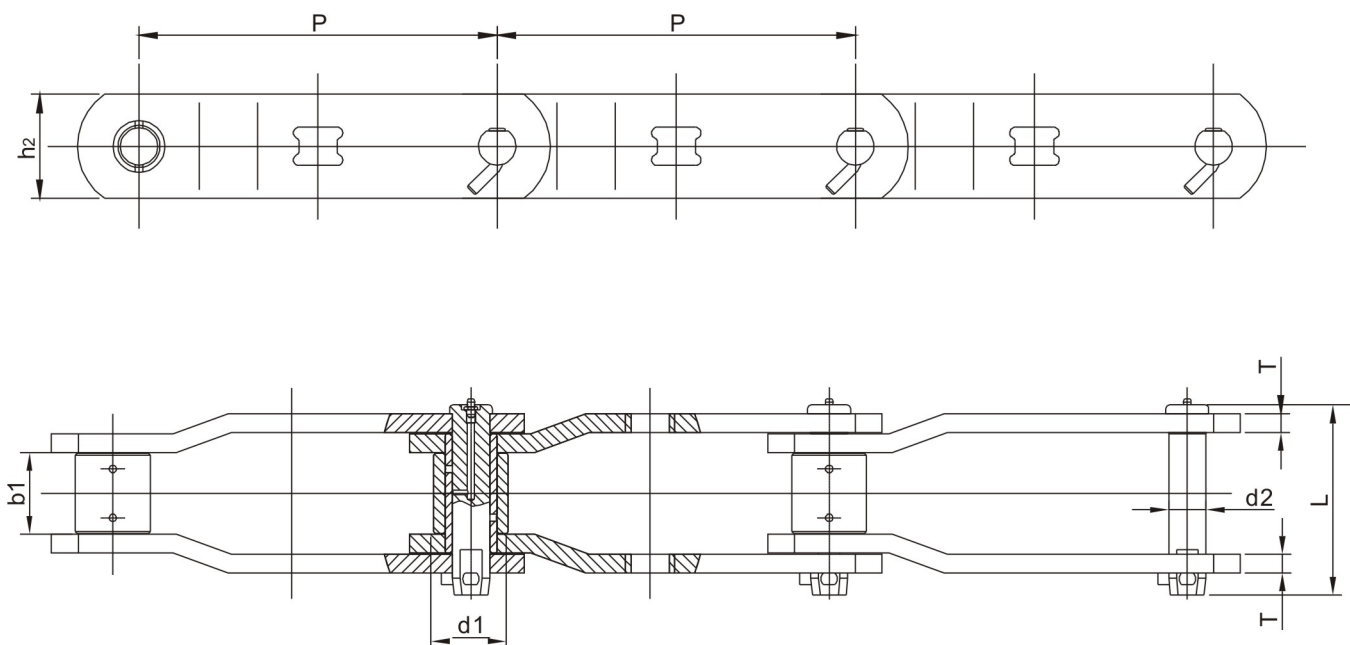

| 环球链号<br>Universal<br>Chain<br>No. | 节距<br>Pitch | 内节内宽<br>Width<br>between<br>inner plates | 滚子直径<br>Roller<br>diameter | 销轴直径<br>Pin<br>diameter | 销轴长度<br>Pin<br>length | 链板高度<br>Inner<br>plate<br>depth | 链板厚度<br>Plate<br>thickness | 抗拉强度<br>Ultimate<br>tensile<br>strength |
|-----------------------------------|-------------|------------------------------------------|----------------------------|-------------------------|-----------------------|---------------------------------|----------------------------|-----------------------------------------|
|                                   | P           | b <sub>1</sub><br>min                    | d <sub>1</sub><br>max      | d <sub>2</sub><br>max   | L<br>max              | h <sub>2</sub>                  | T                          | Q<br>min                                |
|                                   | mm          | mm                                       | mm                         | mm                      | mm                    | mm                              | mm                         | KN                                      |
| 2614M14                           | 304.8       | 69.85                                    | 63.5                       | 31.75                   | 161.9                 | 88.9                            | 15.88                      | 900                                     |