


API 链号	GB链号 ISO链号	节距 Pitch	滚子直径 Roller diameter	内链节内宽 Inner width of inner chain link	销轴直径 Bearing pin diameter	链板厚度 Plate thickness	链板高度 Plate height	排距 Array pitch	销轴长度 Bearing pin length	抗拉载荷 Tensile load	每米重量 Weight/m
API Chain No.	GB chain no. ISO chain no.	P	d ₁ max	b ₁ min	d ₂ max	s	h ₂ max	Pt	L max	min kN	kg/m
80GA-1	16A-1	25.40	15.87	15.75	7.94	3.18	24.13	29.29	36.20	55.60	2.84
80GA-2	16A-2	25.40	15.87	15.75	7.94	3.18	24.13	29.29	65.50	111.20	5.54
80GA-3	16A-3	25.40	15.87	15.75	7.94	3.18	24.13	29.29	94.80	168.80	8.23
80GA-4	16A-4	25.40	15.87	15.75	7.94	3.18	24.13	29.29	124.10	222.40	10.93
80GA-5	16A-5	25.40	15.87	15.75	7.94	3.18	24.13	29.29	153.40	278.00	13.63
80GA-6	16A-6	25.40	15.87	15.75	7.94	3.18	24.13	29.29	182.70	333.80	16.32
80GA-8	16A-8	25.40	15.87	15.75	7.94	3.18	24.13	29.29	241.20	444.80	21.72
100GA-1	20A-1	31.75	19.05	18.90	9.54	3.96	30.18	35.76	43.60	86.74	4.25
100GA-2	20A-2	31.75	19.05	18.90	9.54	3.96	30.18	35.76	79.40	173.48	8.31
100GA-3	20A-3	31.75	19.05	18.90	9.54	3.96	30.18	35.76	115.20	260.22	12.36
100GA-4	20A-4	31.75	19.05	18.90	9.54	3.96	30.18	35.76	150.90	348.96	16.41
100GA-5	20A-5	31.75	19.05	18.90	9.54	3.96	30.18	35.76	186.60	433.70	20.47
100GA-6	20A-6	31.75	19.05	18.90	9.54	3.96	30.18	35.76	222.40	520.44	24.52
100GA-8	20A-8	31.75	19.05	18.90	9.54	3.96	30.18	35.76	293.90	693.92	32.63
120GA-1	24A-1	38.10	22.22	25.23	11.11	4.75	36.20	45.44	54.10	125.10	6.18
120GA-2	24A-2	38.10	22.22	25.23	11.11	4.75	36.20	45.44	99.50	250.20	12.12
120GA-3	24A-3	38.10	22.22	25.23	11.11	4.75	36.20	45.44	145.00	375.30	18.06
120GA-4	24A-4	38.10	22.22	25.23	11.11	4.75	36.20	45.44	190.40	500.40	23.99
120GA-5	24A-5	38.10	22.22	25.23	11.11	4.75	36.20	45.44	235.90	625.50	29.93
120GA-6	24A-6	38.10	22.22	25.23	11.11	4.75	36.20	45.44	281.30	750.60	35.87
120GA-8	24A-8	38.10	22.22	25.23	11.11	4.75	36.20	45.44	372.20	1000.80	47.75
120GA-10	24A-10	38.10	22.22	25.23	11.11	4.75	36.20	45.44	463.10	1251.00	59.63
140GA-1	28A-1	44.45	25.40	25.23	12.71	5.56	42.24	48.87	58.40	170.27	7.94
140GA-2	28A-2	44.45	25.40	25.23	12.71	5.56	42.24	48.87	107.30	340.54	15.60
140GA-3	28A-3	44.45	25.40	25.23	12.71	5.56	42.24	48.87	156.10	510.81	23.25
140GA-4	28A-4	44.45	25.40	25.23	12.71	5.56	42.24	48.87	205.00	681.08	30.90
140GA-5	28A-5	44.45	25.40	25.23	12.71	5.56	42.24	48.87	253.90	851.35	38.55
140GA-6	28A-6	44.45	25.40	25.23	12.71	5.56	42.24	48.87	302.80	1021.62	46.20
140GA-8	28A-8	44.45	25.40	25.23	12.71	5.56	42.24	48.87	400.50	1362.16	61.50
140GA-10	28A-10	44.45	25.40	25.23	12.71	5.56	42.24	48.87	498.20	1702.70	76.81
160GA-1	32A-1	50.80	28.57	31.55	14.29	6.35	48.26	58.55	69.00	222.40	10.47
160GA-2	32A-2	50.80	28.57	31.55	14.29	6.35	48.26	58.55	127.60	444.80	20.65
160GA-3	32A-3	50.80	28.57	31.55	14.29	6.35	48.26	58.55	186.10	667.20	30.82
160GA-4	32A-4	50.80	28.57	31.55	14.29	6.35	48.26	58.55	244.70	889.60	40.99
160GA-5	32A-5	50.80	28.57	31.55	14.29	6.35	48.26	58.55	303.20	1112.00	51.60
160GA-6	32A-6	50.80	28.57	31.55	14.29	6.35	48.26	58.55	361.80	1334.40	61.33
160GA-8	32A-8	50.80	28.57	31.55	14.29	6.35	48.26	58.55	478.90	1779.20	81.68
180GA-1	36A-1	57.15	35.71	35.48	17.46	7.14	54.31	65.84	77.70	280.20	13.96
180GA-2	36A-2	57.15	35.71	35.48	17.46	7.14	54.31	65.84	133.50	560.50	27.88
180GA-3	36A-3	57.15	35.71	35.48	17.46	7.14	54.31	65.84	209.40	840.70	41.62
180GA-4	36A-4	57.15	35.71	35.48	17.46	7.14	54.31	65.84	275.20	1121.00	55.36
200GA-1	40A-1	63.50	39.67	37.85	19.85	7.92	60.33	71.55	84.50	347.50	17.35
200GA-2	40A-2	63.50	39.67	37.85	19.85	7.92	60.33	71.55	156.10	695.00	34.14
200GA-3	40A-3	63.50	39.67	37.85	19.85	7.92	60.33	71.55	227.60	1042.50	50.94
200GA-4	40A-4	63.50	39.67	37.85	19.85	7.92	60.33	71.55	299.20	1390.00	67.73
240GA-1	48A-1	76.20	47.62	47.35	23.81	9.52	72.39	87.83	102.20	500.40	25.20
240GA-2	48A-2	76.20	47.62	47.35	23.81	9.52	72.39	87.83	190.10	1000.80	49.81
240GA-3	48A-3	76.20	47.62	47.35	23.81	9.52	72.39	87.83	277.90	1501.20	74.43
240GA-4	48A-4	76.20	47.62	47.35	23.81	9.52	72.39	87.83	365.70	2001.60	99.04

油田链

Oil field chains

A

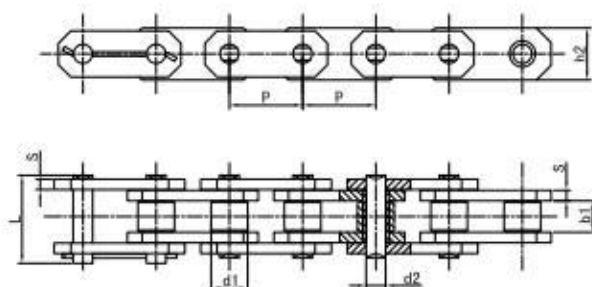

链号	节距	滚子直径	内链节内宽	销轴直径	链板厚度	链板高度	销轴长度	节距	抗拉载荷	每米重量
chain no.	P	d ₁	b ₁	d ₂	s	h ₂	L	Pt	Tensile load	Weight/m
	mm	mm	mm	mm	mm	mm	mm	mm	min kN	kg/m
S88.90	88.90	44.45	38.10	23.81	12.70	63.50	107.00		550.00	24.40
S77.90	77.90	41.28	39.60	19.08	9.70	60.00	95.50		378.00	18.90
S103	103.45	57.15	49.30	27.97	14.20	73.00	134.90		700.00	32.70
S114	114.30	63.50	52.30	31.78	14.20	91.90	141.20		900.00	42.90
S127	127.00	66.68	55.55	33.34	15.88	88.90	150.00		934.00	59.60
S125	125.40	76.02	80.60	52.00	20.20	132.00	188.00		2167.00	111.40

