




ISO/DIN 链号ISO/DIN Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	T	Q min	Q ₀
	mm	mm	mm	mm	mm	mm	mm	kN	kN
SS40SL	78.11	31.75	31.75	15.90	89.65	38.00	9.50	265.60	300.00


横梁与链条装配尺寸:

代号	A	D	B	代号	A	D	B
SS40SL-141-00	113	424.66	542.93	SS40SL -152-00	100	278.61	396.88
SS40SL -142-00	98	424.66	542.93	SS40SL -153-00	103	381.79	500.06
SS40SL -143-00	103	424.66	542.93	SS40SL -154-00	89	424.66	542.93
SS40SL-144-00	88	381.79	500.06	SS40SL -155-00	104	278.61	396.88
SS40SL -145-00	116	570.71	688.98	SS40SL -156-00	102	424.66	542.93
SS40SL -146-00	111	470.69	588.96	SS40SL -157-00	111	381.79	500.06
SS40SL -147-00	96	470.69	588.96	SS40SL -158-00	108	381.79	500.06
SS40SL -148-00	86	424.66	542.93	SS40SL -159-00	108	468.31	586.58
SS40SL -149-00	81	424.66	542.93	SS40SL -160-00	116	468.31	586.58
SS40SL -150-00	97	424.66	542.93	SS40SL -175-00	107	381.79	500.06
SS40SL -151-00	87	348.46	466.73	SS40SL -176-00	100	424.66	542.93

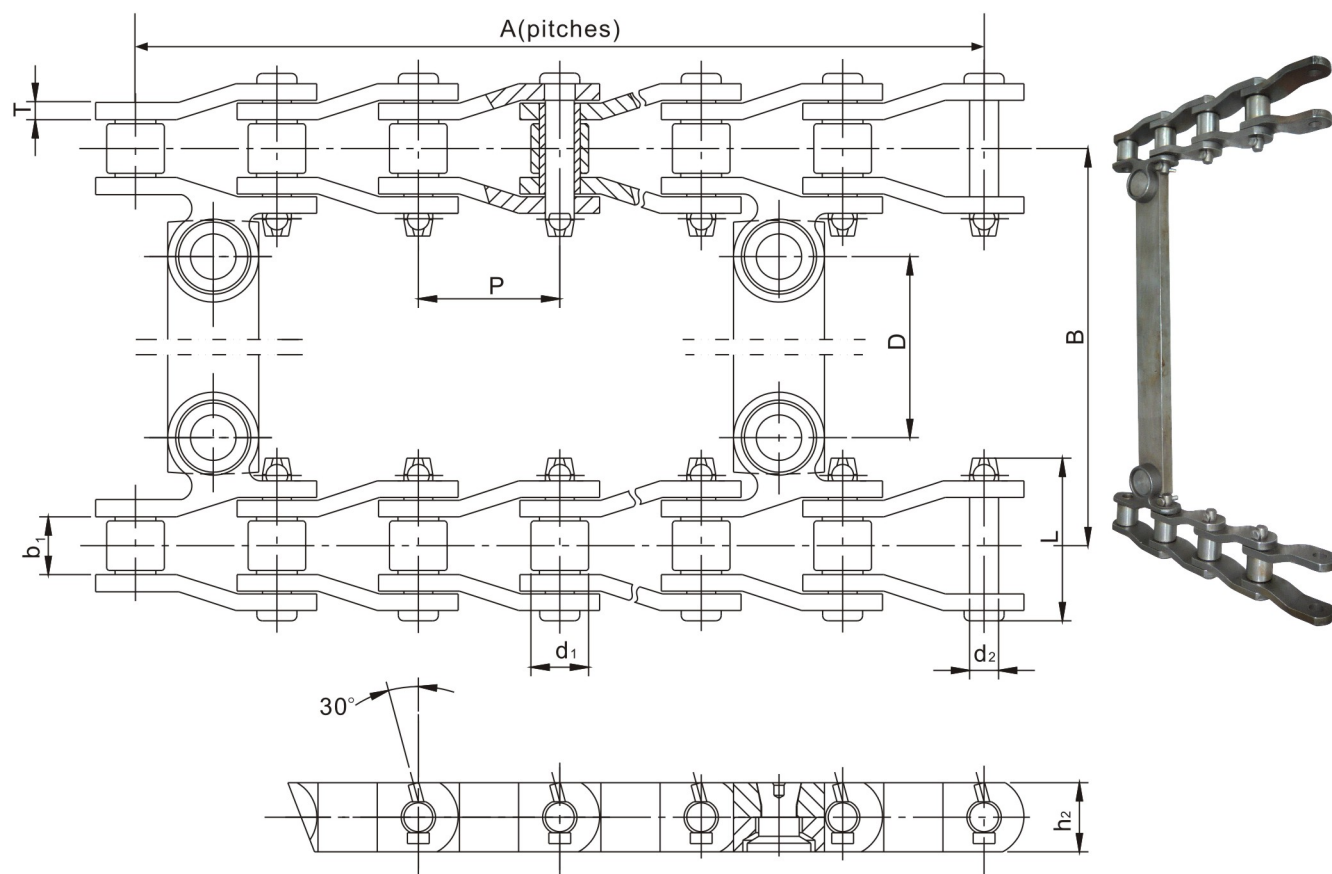


铺路机链

Paver machine chains

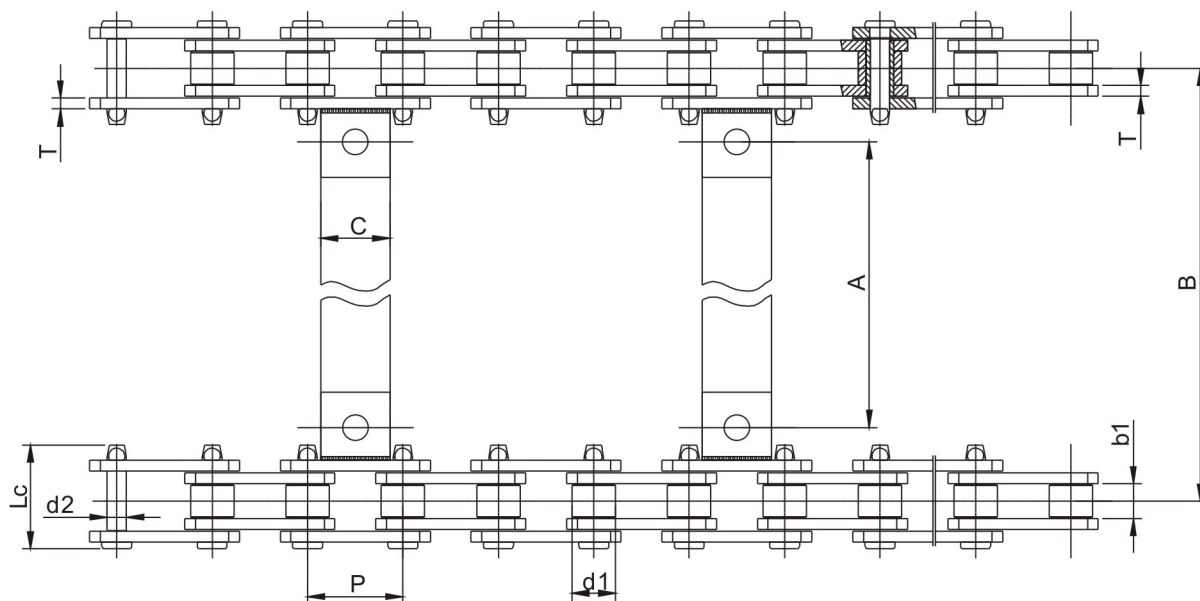


附件代号 ATT.No.	A	B	C
	mm	mm	mm
RP150	375	483	50.8
RP190	477	585	50.8




环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength
	P	d ₁ max	b ₁ min	d ₂ max	Lc max	h ₂ max	T	Q min
	mm	mm	mm	mm	mm	mm	mm	KN
MSR1594	69.85	31.75	25.6	14.22	76.8	31.75	7.9	106.73




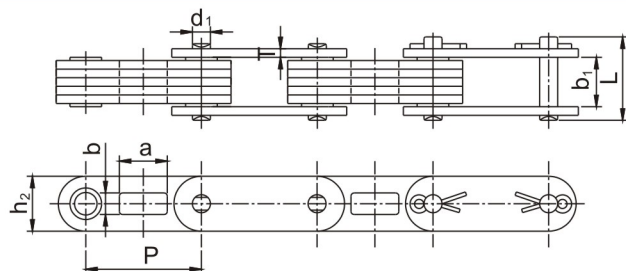

节距 Pitch	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	内链板结构尺寸 Inner plate dimension		抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
P	b ₁	d ₁	L	h ₂	T	a	b	Q min	q ≈
mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
75	32	14.27	54.20	36	5.60	34	14	100	7.18

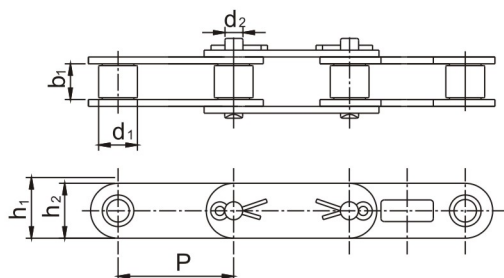

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	通道高度 Chain path depth	链板高度 Plate depth	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	d ₁	b ₁	d ₂	h ₁	h ₂	Q	q
	mm	max mm	min mm	max mm	min mm	max mm	min kN	≈ kg/m
A 5188	66.27	28.58	23.80	12.60	29.50	28.80	133.50	6.14
SGR188	66.27	22.23	26.50	11.10	29.50	28.80	143.00	6.83
C 1594	69.85	31.75	25.60	14.27	36.30	32.50	106.73	9.27

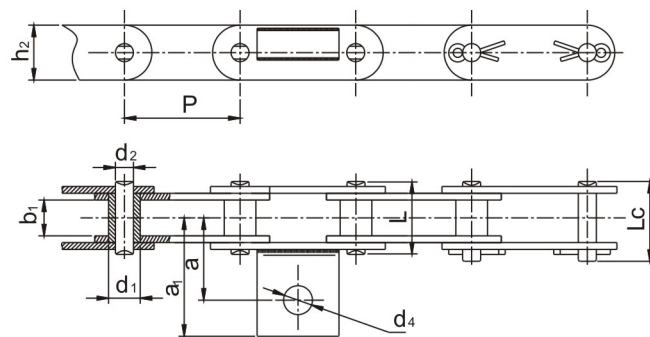

节距 Pitch	内节内宽 Width between inner plates	套筒外径 Bush diameter	链板高度 Plate depth	销轴尺寸 Pin dimension			刮板结构尺寸 Scraper dimension			抗拉强度 Ultimate tensile strength	每米重量 Weight Per meter
P	b ₁ min	d ₁	h ₂	L	Lc	d ₂	a	a ₁	d ₄	Q min	q ≈
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
80	35.80	26	45	72	77	15.90	56.90	81.90	20	190	9