
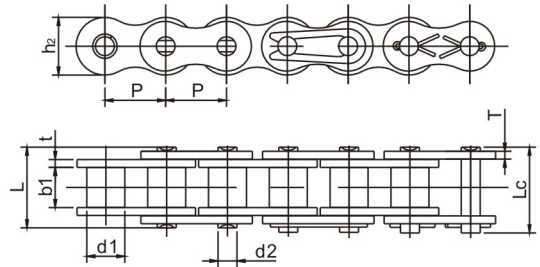


不锈钢链条适用于高低温(-20℃to400℃),防腐蚀和洁净的场所,它也可适用输送链附件。

Stainless steel chains are suitable in operating environment requiring high thermal resistance (-20℃to400℃), corrosion resistance and cleanliness. They can also be fitted with attachments for conveyor purpose.

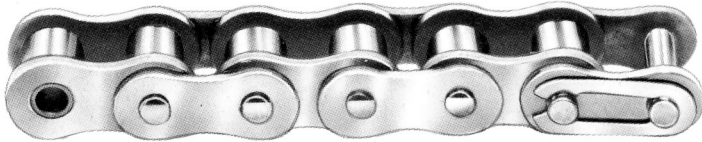

环球链号 Universal Chain No	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T	Q min	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*25SS	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	2.50	0.15
*35SS	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	5.50	0.33
40SS	12.70	7.95	7.85	3.96	16.60	17.80	12.20	1.50	9.70	0.63
41SS	12.70	7.77	6.25	3.58	13.75	15.00	9.910	1.30	6.00	0.46
50SS	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.06	15.3	1.03
60SS	19.05	11.91	12.57	5.94	25.90	27.70	18.00	2.44	21.8	1.51
80SS	25.40	15.88	15.75	7.92		35.00	24.00	3.26	38.9	2.60
100SS	31.75	19.05	18.90	9.53	40.40	44.70	30.00	4.00	59.0	3.94
120SS	38.10	22.23	25.22	11.10	50.30	54.30	35.70	4.80	72.5	5.72
140SS	44.45	25.40	25.22	12.70	54.40	59.00	41.00	5.60	94.0	7.70
04BSS	6.00	4.00	2.80	1.85	6.80	7.80	5.00	0.60	2.00	0.11
05BSS	8.00	5.00	3.00	2.31	8.20	8.90	7.10	0.80	3.50	0.20
#06BSS	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	6.20	0.41
08BSS	12.70	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.0	0.70
10BSS	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	14.5	0.94
12BSS	19.05	12.07	11.68	5.72	22.50	24.20	16.00	1.85	18.5	1.16
16BSS	25.40	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.10	40.0	2.13
20BSS	31.75	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	59.0	3.73
24BSS	38.10	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	104.0	7.20
32BSS	50.80	29.21	30.99	17.81		71.00	42.00	7.0/6.0	150.0	

*套筒链: 表中滚子直径d1为套筒直径

Bushing chain: d1 in the table indicate the external diameter of the bushing

#直链板

#Straight side plates

注: 不锈钢双节距准动与输送链尺寸参见标准链, 双排链, 三排链尺寸参见标准链。

Note: Dimension of double pitch stainless steel chains: refer to standard chains.


Dimension of double strand & triple strand stainless steel chains: refer to standard chains.




不锈钢双节距输送链

Double pitch stainless steel conveyor chains

小滚子型 Small roller type

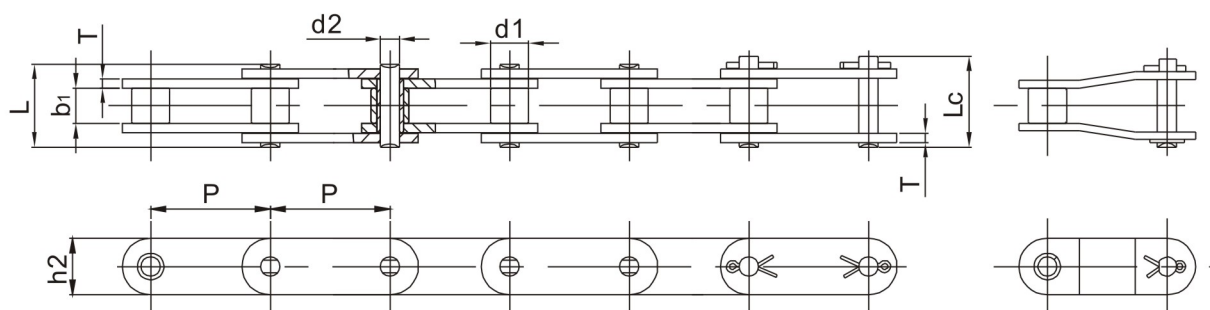


大滚子型 Large roller type

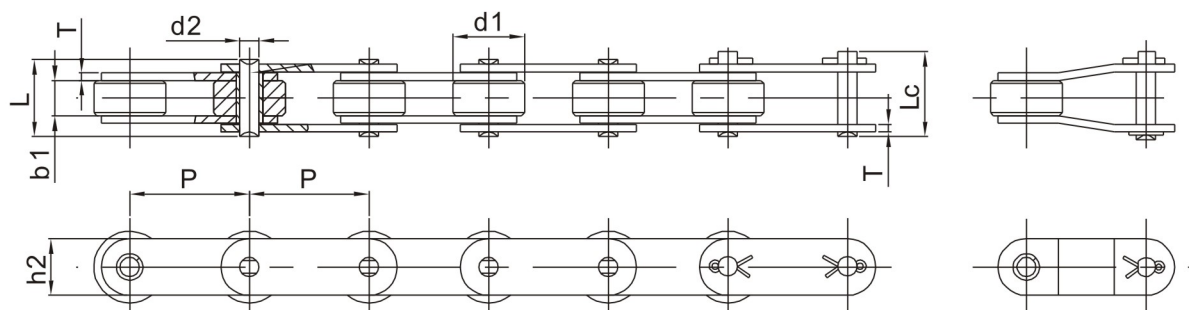


环球链号 Universal Chain No	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	g max	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
C2040SS	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	9.6	0.51
C2042SS		15.88								0.85
C2040HSS	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	9.6	0.66
C208BSS	25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	12.0	0.56
C208BLSS		15.88								0.90
C2050SS	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	15.2	0.79
C2052SS		19.05								1.29
C2060SS	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	21.7	1.13
C2062SS		22.23								1.63
C2060HSS	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	21.7	1.46
C2062HSS		22.23								3.10
C2080SS	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	38.9	2.11
C2082SS		28.58								3.16
C2080HSS	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.0	38.9	2.57
C2082HSS		28.58								3.63
C2100SS	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.0	60.0	3.05
C2102SS		39.67								4.89
C2100HSS	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.8	60.0	3.61
C2102HSS		39.67								5.45


A-1

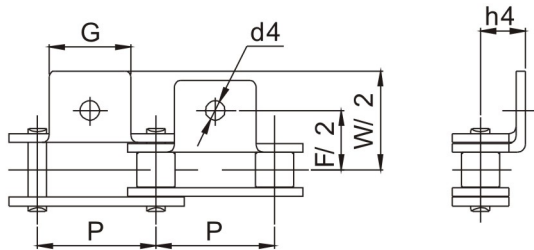


K-1

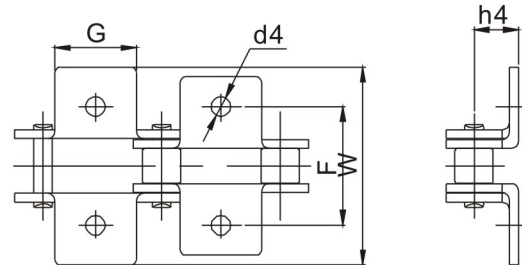

A-2

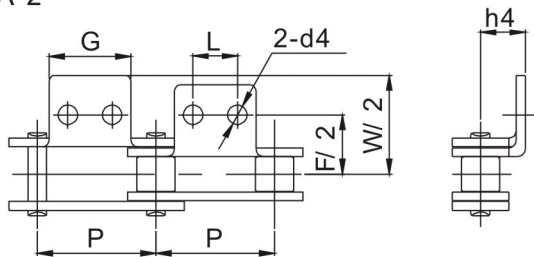

K-2

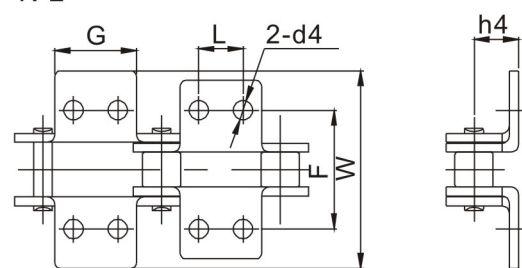


环球链号 Universal Chain No	P	G	L	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
C2040SS	25.40	19.1	9.5	25.4	39.6	9.1	3.4
C2042SS							
C208BSS	25.40	23.2	12.7	25.4	39.6	9.1	4.5
C208BLSS							
C2050SS	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C2052SS							
C2060SS	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C2062SS							
C2060HSS	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C2062HSS							
C2080SS	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C2082SS							
C2080HSS	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C2082HSS							
C2100SS	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C2102SS							
C2100HSS	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C2102HSS							



不锈钢空心销轴链

Stainless steel hollow pin chains

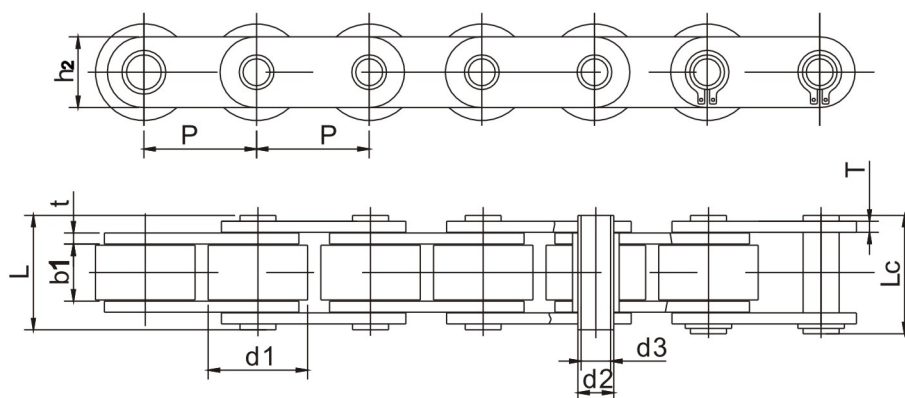

环球链号 Universal Chain No	节 距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	B max	t/T	Q min	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
C2042HPSS	25.40	15.88	7.85	5.63	4.00	16.5	17.6	12.0	1.50	7.70	0.79
C2052HPSS	31.75	19.05	9.53	7.22	5.12	20.5	21.8	15.0	2.03	14.3	1.27
C2062HPSS	38.10	22.23	12.70	8.31	6.00	25.8	26.8	17.0	2.42	16.8	1.74
C2082HPSS	50.80	28.58	15.75	11.40	8.05	32.4	33.8	24.0	3.25	35.0	2.86
C2042H-HPSS	25.40	15.88	7.85	5.63	4.00	18.8	19.9	12.0	2.03	7.70	0.96
C2052H-HPSS	31.75	19.05	9.53	7.22	5.12	22.1	23.4	15.0	2.42	14.3	1.46
C2062H-HPSS	38.10	22.23	12.70	8.31	6.00	29.2	30.2	17.0	3.25	16.8	2.02
C2082H-HPSS	50.80	28.58	15.75	11.40	8.05	36.2	37.6	24.0	4.00	35.0	3.30
*P200HBaSS-F	200.0	90.00	32.98	43.00	35.20	—	59.0	64.0	4.00	30.0	9.40

注：*F型滚子
Note:* Flange roller