




侧弯链

Side bow chains

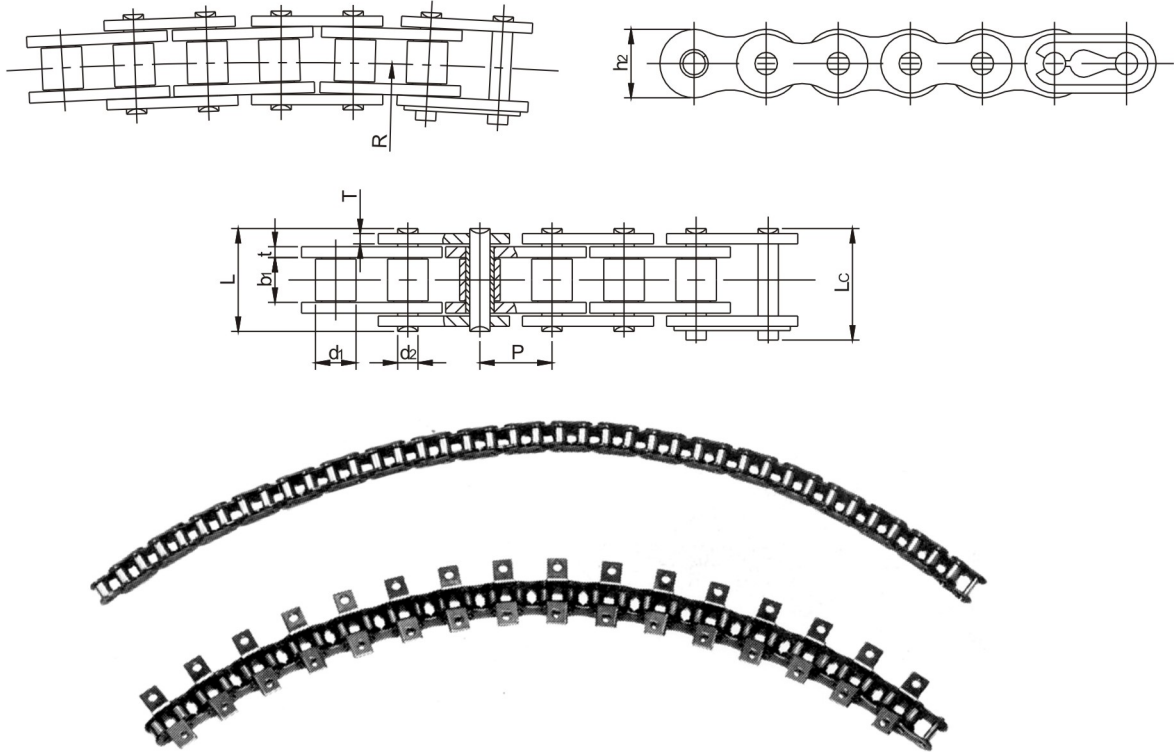

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin length	销轴长度 pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	侧弯半径 Side bow radius	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	Lc max	h <sub>2</sub> max	t/T	R min	Q min	Q <sub>0</sub>	q =
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB	kN	kg/m
40SB	12.7	7.95	7.85	3.96	16.90	18.10	11.70	1.50	350	13.80/3136	15.20	0.80
43SB	12.7	7.95	7.85	3.45	18.30	19.50	11.70	1.50	305	12.00/2727	13.20	0.64
50SB	15.875	10.16	9.40	4.37	20.70	22.70	15.09	2.00	400	20.60/4681	22.70	1.09
60SB	19.05	11.91	12.57	5.34	26.60	28.40	18.10	2.40	500	15.70/3568	17.30	1.42
63SB	19.05	11.91	12.68	5.08	28.80	30.60	17.20	2.4/2.0	350	12.50/2840	20.00	1.40
80SB	25.40	15.88	15.75	7.19	34.00	37.30	24.00	3.20	711	40.90/9201	42.00	2.60
08BSB	12.70	8.51	7.75	3.97	17.40	18.70	11.80	1.60	400	14.00/3182	15.40	0.70
08BSBF1	12.70	8.51	7.75	3.97	16.30	17.60	11.80	1.6/1.2	400	12.80/2909	14.10	0.65
10BSB	15.875	10.16	9.65	4.50	20.10	21.50	14.70	1.70	400	15.60/3545	17.20	0.93
12BSB	19.05	12.07	11.68	5.12	23.10	24.80	16.00	1.85	500	20.50/4658	22.60	1.16
16BSB	25.40	15.88	17.22	7.90	36.50	39.70	21.00	3.7/3.0	500	55.6/12635	64.00	2.53
C2050SB	31.75	10.16	9.40	5.08	21.30	22.60	15.00	2.03	800	21.80/4954	24.10	0.84