




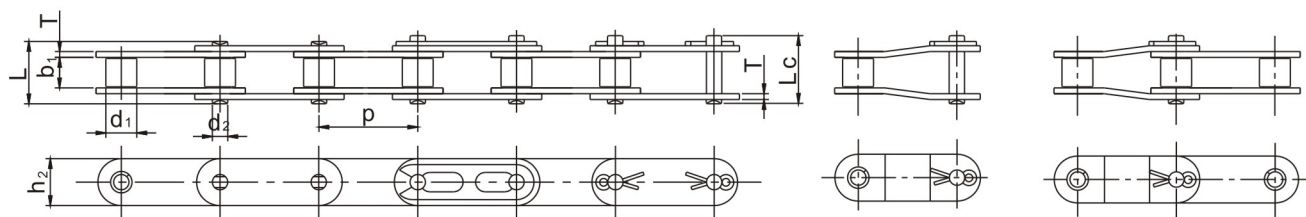


双节距输送链

Double pitch conveyor chains

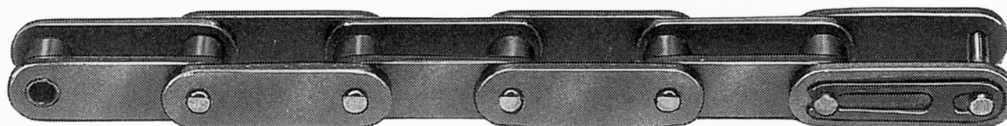

小滚子型 Small Roller Type

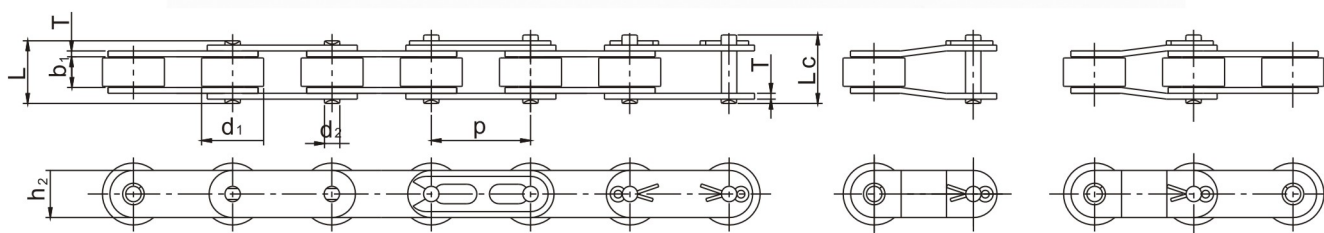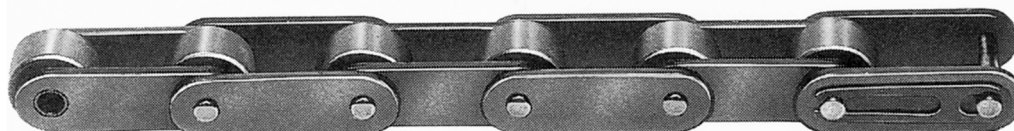

大滚子型 Large Roller Type

ISO/ DIN 链号 ISO/ DIN Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch P	滚子直径 Roller diameter d ₁	内节内宽 Width between inner plates b ₁	销轴直径 Pin diameter d ₂	销轴长度 Pin length		内链板高度 Inner plate depth h ₂	链板厚度 Plate thickness T	抗拉强度 Ultimate tensile strength Q(ISO/DIN) min kN	平均抗拉强度 Average tensile strength Q ₀	每米重量 Weight per meter q
						L	Lc					
						max mm	max mm					
C208A	C2040	25.40	7.95	7.85	3.96	17.80	21.70	12.07	1.50	13.80/14.10	17.80	0.50
C208AL	C2042		15.88									
C208B		25.40	8.51	7.75	4.45	17.00	20.90	11.81	1.60	17.80/18.00	19.60	0.55
C208BL			15.88									
C210A	C2050	31.75	10.16	9.40	5.08	21.80	25.90	15.09	2.06	21.80/22.20	28.00	0.73
C210AL	C2052		19.05									
C212A	C2060	38.10	11.91	12.57	5.94	26.90	31.50	18.08	2.44	31.10/31.80	39.00	1.12
C212AL	C2062		22.23									
C212AH	C2060H	38.10	11.91	12.57	5.94	29.90	34.50	18.08	3.26	31.10/31.80	39.00	1.44
C212AHL	C2062H		22.23									
C216A	C2080	50.80	15.88	15.75	7.92	33.50	38.90	24.13	3.26	55.60/56.70	71.50	2.08
C216AL	C2082		28.58									
C216AH	C2080H	50.80	15.88	15.75	7.92	36.60	42.00	24.13	4.00	55.60/56.70	71.50	2.54
C216AHL	C2082H		28.58									
C220A	C2100	63.50	19.05	18.90	9.53	41.40	47.20	30.18	4.00	86.70/88.50	102.00	3.01
C220AL	C2102		39.67									
C220AH	C2100H	63.50	19.05	18.90	9.53	44.10	50.20	30.18	4.80	86.70/88.50	102.00	3.56
C220AHL	C2102H		39.67									
C224A	C2120	76.20	22.23	25.22	11.10	50.30	54.30	35.70	4.80	124.60/127.00	156.90	4.66
C224AL	C2122		44.45									
C224AH	C2120H	76.20	22.23	25.22	11.10	53.50	57.50	35.70	5.65	124.60/127.00	156.90	5.26
C224AHL	C2122H		44.45									
C232A	C2160	101.60	28.58	31.75	14.27	64.80	69.60	47.80	6.45	222.40/226.80	269.70	8.15
C232AL	C2162		57.15									
C232AH	C2160H	101.60	28.58	31.75	14.27	68.20	73.00	47.80	7.25	222.40/226.80	269.70	9.06
C232AHL	C2162H		57.15									