



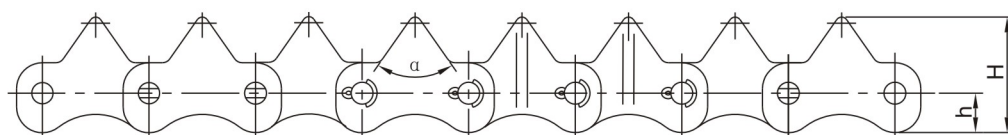


水稻收割机链

Rice harvester chains



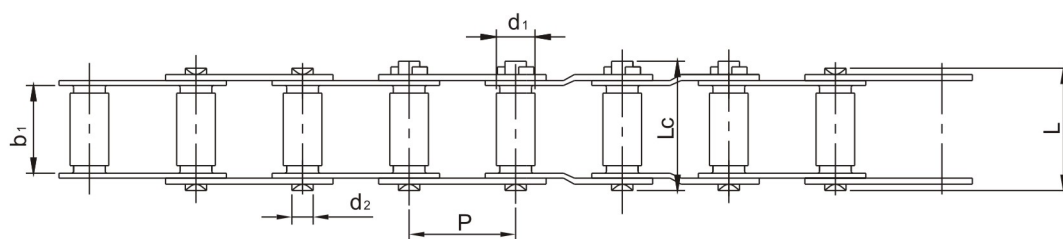


型式 I
Type I

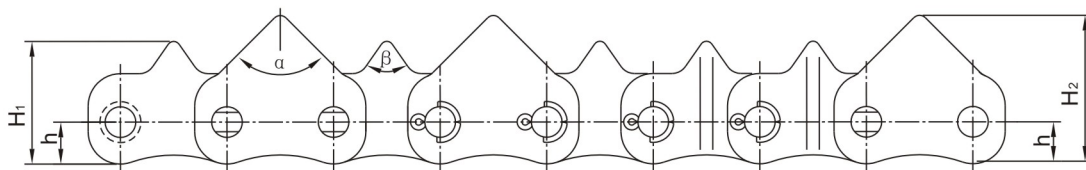

型式 II
Type II

ISO/DIN 链号 ISO/DIN Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		齿形角 Tooth angle	链板尺寸 Plate dimensions		抗拉强度 Ultimate tensile strength	型式 type
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	α	h	H	Q min	
	mm	mm	mm	mm	mm	mm	Angle	mm	mm	kN	
3318T	33	10.1	18	7	29.5	32.0	70°	13	38	19.6	I
3322T	33	10.1	22	7	33.5	36.0	70°	13	38	19.6	I
3325T	33	10.1	25	7	36.5	39.0	70°	13	38	19.6	I
3325Ta	33	10.1	25	7	35.2	37.4	90°	13	38	19.6	I
3330T1	33	10.1	30	7	41.5	44.0	60°	13	43	19.6	I
3330T2	33	10.1	30	7	41.5	44.0	70°	13	38	19.6	I
3330Ta	33	12.8	30	7	39.5	42.5	70°	13	38	19.6	I
3358T	33	10.1	58	7	69.5	72.0	70°	10	43	19.6	I
3358Ta	33	10.1	58	7	68.5	70.8	75°	10	43	19.6	I
3558T	35	10.1	58	7	69.35	71.65	90°	15	48	22.5	I
3358b	33	12.8	58	9.5	70.1	72.8	α: 90° β: 75°	13	H ₁ : 38 H ₂ : 46	19.6	II
3358C/C"b	33	12.7	58	9.5	70.3	72.9	α: 90° β: 70°	13	H ₁ : 38 H ₂ : 46	19.6	II

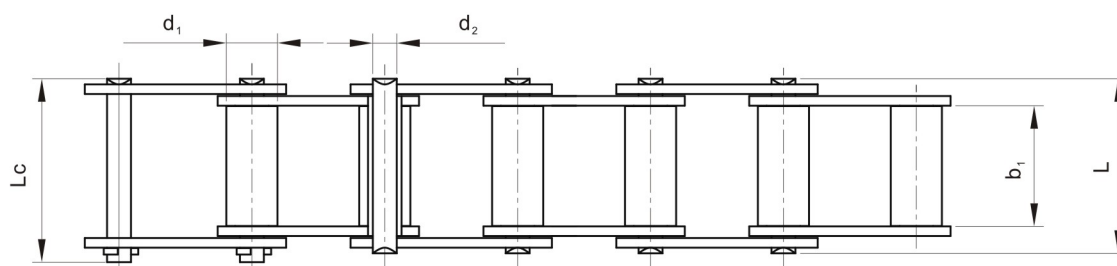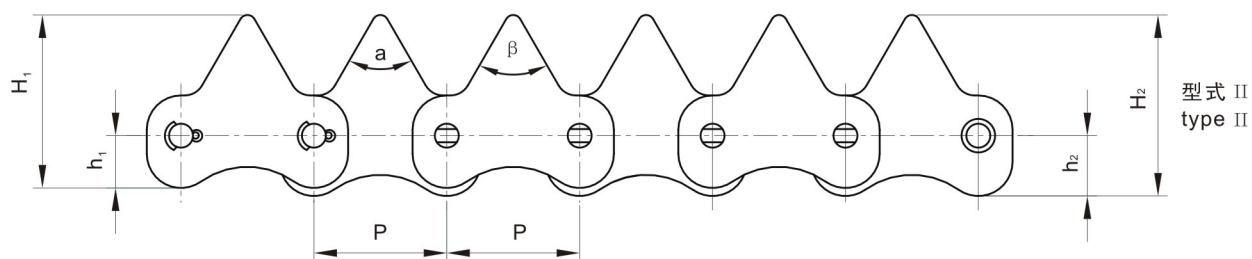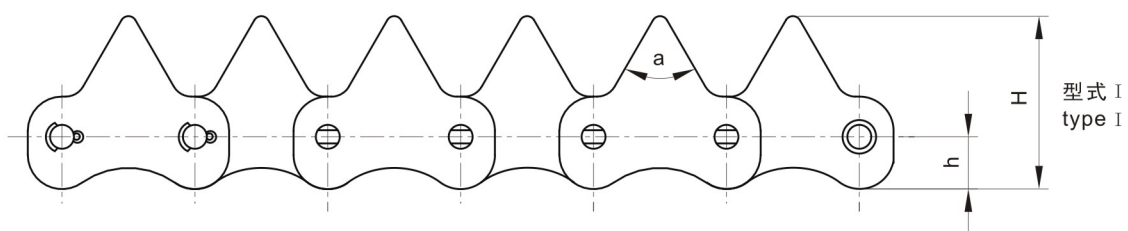

ISO/DIN 链号 ISO/DIN Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		齿形角 Tooth angle	链板尺寸 Plate dimensions		抗拉强度 Ultimate tensile strength	型式 type
	P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	α	h	H	Q min	
	mm	mm	mm	mm	mm	mm	Angle	mm	mm	kN	
3330	33	12.7	30	5.94	43.5	45.6	60°	h ₁ : 13 h ₂ : 15	H ₁ : 43 H ₂ : 45	19.6	II
3330a	33	12.7	30	5.94	43.5	45.6	70°	13	38	19.6	I
3322	33	12.7	22	5.94	35.5	37.6	70°	15	40	19.6	I
3358	33	12.7	58	7.0	70.9	73.5	α: 90° β: 75°	13	H ₁ : 38 H ₂ : 46	19.6	II